

PRECISION FLOW METERS FOR LIQUID APPLICATIONS

10X Series
Microturbine Flow Sensors
Models 106 | 106S | 106F



APPLICATION IDEAS

- Analysis sample rate verification
- Totalizing chemical injection streams
- Test stand flow monitoring
- Upgrading rotameters to monitor flow rate

Product Description

McMillan 10X Series Flow Sensors are capable of measuring extremely low flow rates. Units are available that measure liquids as low as 13 mL/min and as high as 50 L/min. Full scale accuracies of $\pm 1.0\%$ or better are available on select models.

A wide variety of liquids may be measured. Repeatable results are achieved using a patented Pelton-type microturbine wheel. This proven design has been providing precision results since 1988 and has developed a well-deserved reputation for continuous operational service for many years without failure.

Because of the compact size and affordable cost of these products, the 10X Series Flow Sensors are suitable for a wide variety of industrial, commercial, laboratory and OEM applications. Some sample applications include measurement of hydrocarbon fluids, fuels, light oils, solvents, coolants, pesticides, mild acids, alkalis, and deionized water. Several power and output configurations are available, including both pulse and analog outputs. NIST Traceable certificates are available on most models.

Principle of Operation

McMillan's microturbine wheel technology utilizes the Pelton turbine wheel concept. This design allows for use of a miniature turbine wheel to measure flow. The wheel is supported on a very small sapphire shaft, held in position by two maintenance-free bearings. Due to the light weight of both the wheel and the shaft, the microturbine wheel is virtually suspended in the flow path. This suspension effect relieves force on the shaft and bearings, eliminating wear.

As flow passes through the flow sensor, it is directed onto the very small teeth of the wheel using a precision-machined nozzle. (As shown with blue arrows in Figure 1) This nozzle is sized according to the flow range of the unit. The rotational speed of the turbine wheel increases proportionally to the volumetric flow rate.

The microturbine wheel has translucent sections integrated into the wheel. An infrared emitter (as shown with red in Figure 1) is located on one side of the wheel, and a sensor on the other. As the wheel rotates, (as shown with green arrows in Figure 1) the infrared beam is alternately interrupted and passed through, detecting wheel speed, and generating a pulse based on flow.

Increased flow causes the wheel to spin faster, increasing the pulse rate. When the wheel stops (under zero flow conditions), no pulses are generated. This eliminates the possibility of "zero drift" and the need for adjustments to the instrument's zero reading. Processing circuitry provides analog and/or pulse outputs that are linearly proportional to the flow rate.

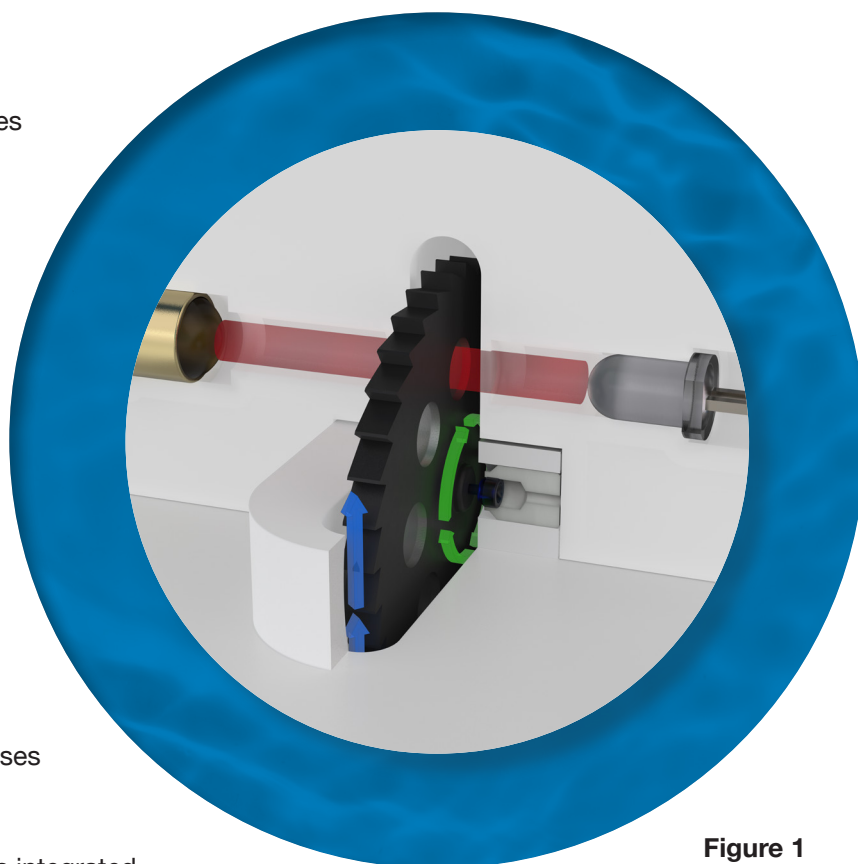


Figure 1
Representation of
microturbine technology

Features and Options

FLOW RANGES*

Units are available that measure liquids as low as 13 mL/min and as high as 50 L/min.

POWER

Most units may be specified to operate with either 12 VDC or 24 VDC power. Various power adapters are also available for use with 12 VDC versions.

SIGNAL OUTPUTS

Models 106 | 106S | 106F have multiple options available, including, 0-5 VDC, 0-10 VDC, pulse, and 4-20 mA output.

ACCURACY/LINEARITY

All liquid models have a standard accuracy specification of $\pm 1\%$ full scale (including linearity). An improved accuracy specification of $\pm 0.5\%$ is available on some models. NIST traceable calibration certificates are standard for improved accuracy ("H") models and optional for standard units.

FLUID CONNECTIONS

Units feature either tube fittings or male integrated flare fittings, based on model. Alternate fitting types and sizes may be selected as noted in the Fitting Availability Chart found on Page 5.

ELECTRICAL CONNECTIONS

Models 106 | 106S | 106F feature an integrated cable with pigtail leads. Additional option of epoxy potted electronics is available for Model 106 (Option "Y").

WETTED MATERIALS

The wetted materials vary depending on the model number. See the specifications for further details.

DISPLAYS*

A variety of remote displays are available for use with the 10X Series Flow Sensors. McMillan also offers a comprehensive range of flow meters with integrated displays.



106



106S



106F

*Contact the factory or an authorized representative for additional information.

Specifications

Except where noted all specifications apply to operation at +25°C

Flow Performance & Hardware

	106	106S	106F
Accuracy (including linearity, best fit straight line)	Analog Output: $\pm 1.0\%$ full scale Pulse Output: $\pm 3.0\%$ full scale		
Repeatability	$\pm 0.2\%$ full scale		
Pressure Rating	Working Pressure: 60 psig [4 barg] * Overpressure Limit: 85 psig [5.8 barg]		
Temperature Rating	Operating Range: 41 to 131 °F [5 to 55 °C] * Storage Range: 32 to 158 °F [0 to 70 °C]		
Temperature Sensitivity	$\pm 0.2\%$ full scale or less per °C		
Wetted Materials	PTFE Sapphire FKM PFA Ruby		
Recommended Filtration	25 microns or less		
Compatible Media	Low viscosity (< 15 cSt), translucent or transparent, degassed		
0-5 VDC Output Signal	Non-isolated, 2500 ohm minimum load		
Pulse Output Signal	7.5VDC peak buffered square wave, 0-400 Hz typical		
4-20 mA Output Signal	Non-isolated, current loop should not exceed 500 ohms		
Power	12 VDC units: 11.5-15 VDC @ 55 mA 24 VDC units: 22-25 VDC @ 55 mA add 20 mA for 4-20 mA output		22-25 VDC @ 65 mA
Response Time	Typically < 1 second to 67% of final value		
Certifications	CE Approved; 89/336/EEC (EN 55011 & EN 50082-1) 73/23/EEC Low Voltage Directive UKCA		
Ratings	IP53 (NEMA 2)		
Warranty	1 Year Limited		

*Other pressure/temperature ratings may be available; Contact the factory or an authorized representative for additional information.

Ordering Information for Models 106 | 106S | 106F

Form part number as follows:

(Base Model) - (Flow Range) (Power/Signal) - (Cable/Connector) - (Fittings) - (Options)

Example: 106F-5A-C6-F4

10 - - - - -

..... **OPTIONS**

- Y** Epoxy-potted PC Board (Model 106 only)
- FN** Add pair of PVDF flare nuts
- NIST** NIST Certificate (water only) **

..... **CONNECTOR / CABLE LENGTH**

- C3** Pigtail Leads, 3ft [0.92m]
- C6** Pigtail Leads, 6ft [1.85m]
- C25** Pigtail Leads, 25ft [7.7m]

..... **POWER / SIGNAL OUTPUT**

- A** 12-15 VDC / Pulse
- B** 22-25 VDC / 0-5 VDC
- C** 15-25 VDC / 4-20 mA
- D** 12-15 VDC / 0-5 VDC
- E** 22-25 VDC / Pulse
- J** 22-25 VDC / 0-10 VDC
- K** 12-15 VDC / 0-10 VDC

..... **FLOW RANGE**

- 3** 13 – 100 mL/min*
- 4** 20 – 200 mL/min
- 5** 50 – 500 mL/min
- 6** 100 – 1000 mL/min
- 7** 200 – 2000 mL/min
- 8** 500 – 5000 mL/min
- 9** 1.0 – 10.0 L/min
- 10** 2.0 – 20.0 L/min (106S and 106F only)
- 11** 5.0 – 50.0 L/min (106S and 106F only)

..... **MODEL**

- 106** PTFE microturbine flow sensor for liquids
- 106S** PTFE microturbine flow sensor with flare connections for liquids
- 106F** PTFE microturbine flow sensor with flare connections for liquids

..... **FITTINGS (SEE FITTING AVAILABILITY CHART BELOW FOR AVAILABLE SIZES BASED ON FLOW RANGE)**

- T2** 1/8" PFA Tube
- T4** 1/4" PFA Tube
- T6** 3/8" PFA Tube
- F4** 1/4" Flare
- F6** 3/8" Flare
- F4** 1/4" Integrated PFA Flare
- F6** 3/8" Integrated PFA Flare
- F7** 1/2" Integrated PFA Flare
- F8** 3/4" Integrated PFA Flare

FITTING AVAILABILITY									
	106					106S 106F			
CODE	T2	T4	T6	F4	F6	F4	F6	F7†	F8
SIZE	1/8"	1/4"	3/8"	1/4"	3/8"	1/4"	3/8"	1/2"	3/4"
MATERIAL	PFA TUBE			PFA FLARE		INTEGRATED FLARE			
RANGE 3	✓	✓		✓		✓	✓		
RANGE 4		✓		✓		✓	✓		
RANGE 5		✓	✓	✓	✓	✓	✓		
RANGE 6		✓	✓	✓	✓	✓	✓		
RANGE 7		✓	✓		✓		✓		
RANGE 8			✓		✓		✓		
RANGE 9			✓		✓		✓	✓	
RANGE 10								✓	✓
RANGE 11									✓

EXAMPLE

106F-5A-C6-F4 would provide a PTFE-bodied microturbine flow sensor that provides a pulse output signal, requires 12 VDC power, includes a 6 foot [1.85 m] cable terminated with pigtail leads, integrates 1/4" male flare fluid connections, and would measure flow rates from 50 – 500 mL/min of water (or similar fluid).

*Best performance from 20 – 100 mL/minute. Response below 20 mL/minute will vary depending on application.


**Contact the factory or an authorized representative for other media options.

† F7 fittings only available for the 106S.

Dimensions

Basic unit configurations shown. Contact factory or an authorized representative for dimensions of units not shown.
All dimensions shown in inches [mm] unless otherwise noted.

106:

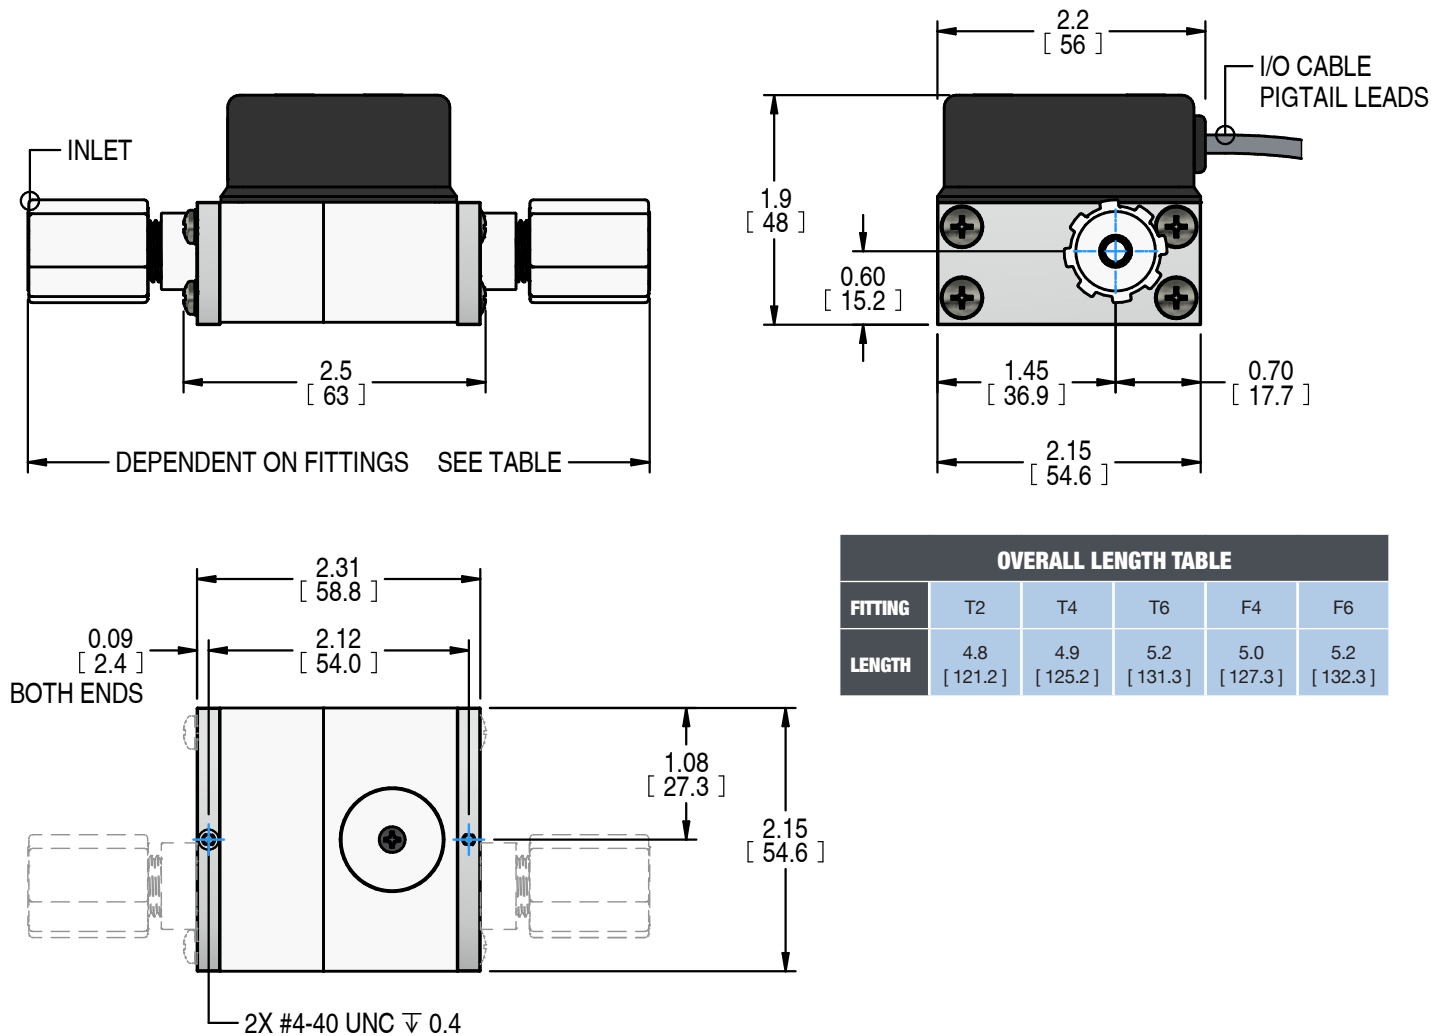


OVERALL LENGTH TABLE					
FITTING	T2	T4	T6	F4	F6
LENGTH	4.8 [121.2]	4.9 [125.2]	5.2 [131.3]	5.0 [127.3]	5.2 [132.3]

Dimensions

Basic unit configurations shown. Contact factory or an authorized representative for dimensions of units not shown.
All dimensions shown in inches [mm] unless otherwise noted.


106S:

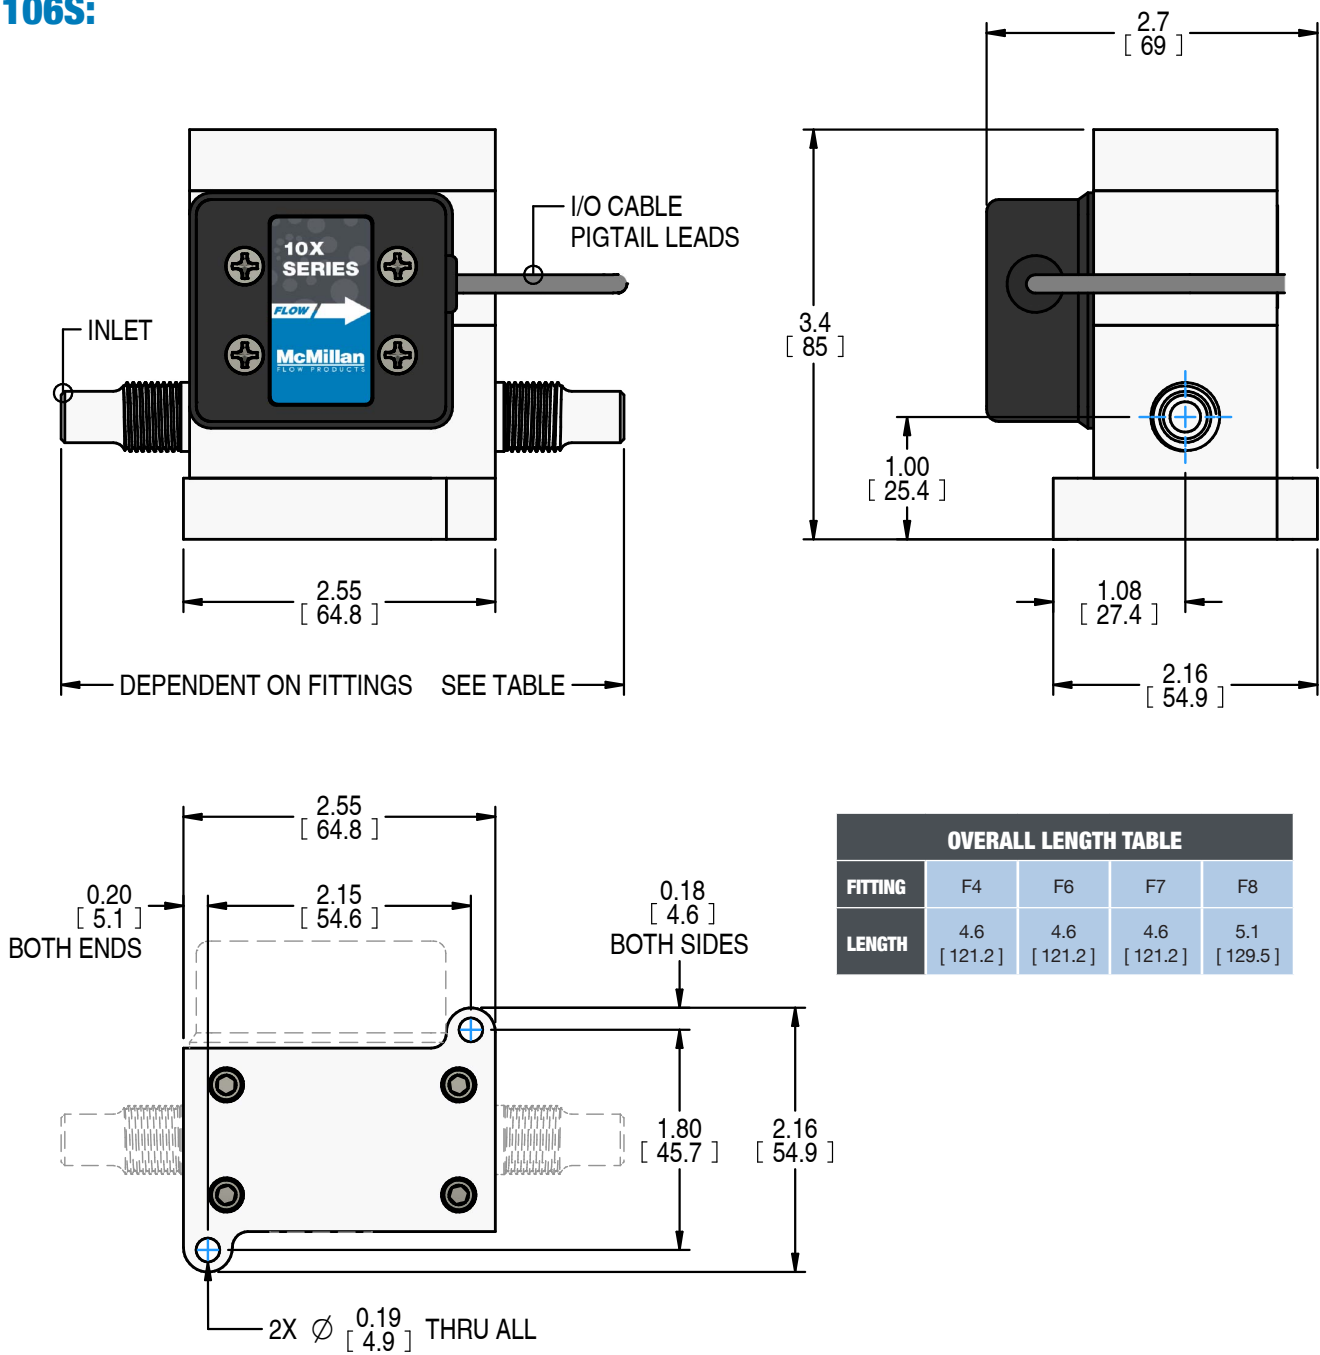

Dimensions

Basic unit configurations shown. Contact factory or an authorized representative for dimensions of units not shown.
All dimensions shown in inches [mm] unless otherwise noted.

106F:

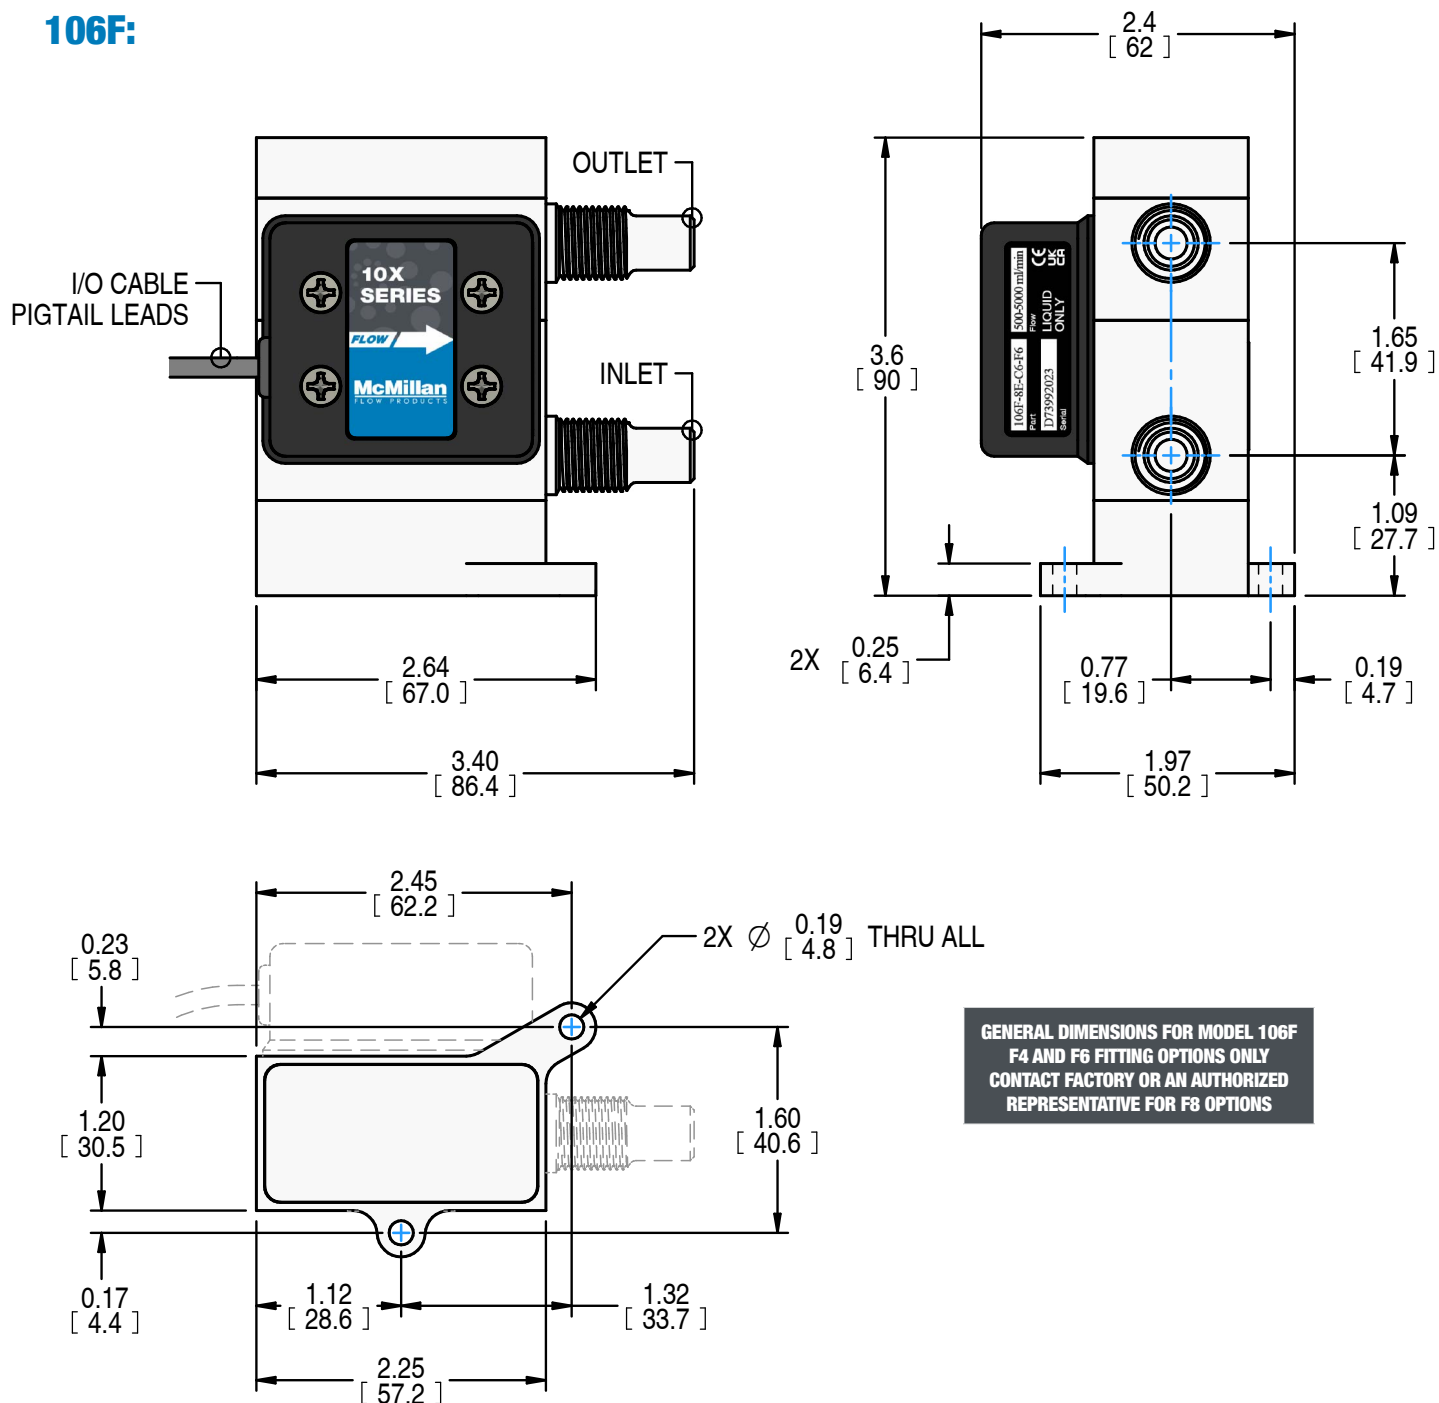

Related Products



S Series Flow Meters

Flow meters with
integrated flow rate display



Model 275 Display

Digital panel display
for use with the 10X



10X Series Flow Meters

Microturbine flow sensors for
liquid applications



McMillan Flow Products
P.O. Box 1340
Georgetown, Texas 78627
Toll-Free: (800) 861-0231 (U.S.A. only)
Direct: +1 (512) 863-0231
Email: sales@mcmflow.com
Website: www.mcmflow.com